


## ETHEREAL STELLA CARRARA BELLA (H) W/ STAINLESS STEEL *Stone, Marble, Metal*

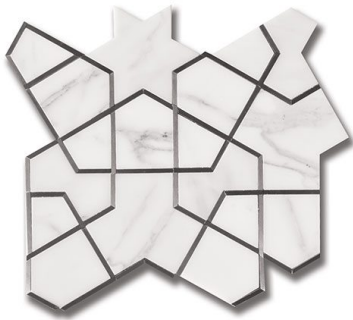

PART NUMBER  
MB1604-STLAH0

PROFILE  
MOSAIC

AVAILABILITY  
AVAILABLE ON REQUEST

GROUT JOINT  
1/16"

DIMENSIONS  
10.25" x 8.75" = .63 sqft

THICKNESS  
3/8" with 0.4cm Stainless Steel I

### NOTES

Epoxy grout should be used when installing ethereal mosaics. For more information, please download the ethereal collection's installation guidelines.

### APPLICATION AREA

WALL	FLOOR	TRAFFIC	EXTERIOR	STEAM SHOWER	WET AREA	POOL	BACKSPLASH
Yes	Yes	Standard Commercial	No	No	YES - when properly sealed	No	YES - Heat not to exceed 293° F
FIREPLACE SURROUND		INTERIOR					
YES - Heat not to exceed 293° F		Yes					

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

### TECHNICAL DATA

#### FEATURES & STANDARD

DCOF - ANSI A.137.1

#### SPECIFICATION

Due to the natural characteristics and variation in natural stone, slip resistance will vary. Such factors are dependent on lots, finish and the topical sealant applied. There is currently no standard industry test with the ability to measure the exact slip resistance.

In order to reduce the slipperiness of stone surfaces, AKDO suggests selecting a Non-Polished finish such as Honed, Sandblasted, or Textured stone, or choosing a mosaic, as the grout joints in the stone result in an increase of friction.