

A high-angle photograph of a modern interior space featuring large, dark grey, rectangular tiles with a mottled, industrial texture. The tiles are laid in a simple grid pattern. On the left, a wooden table with a thick top and a wooden leg is partially visible. On the right, a dark, possibly black, metal chair with a distinctive X-shaped base is partially visible. The lighting is soft and even, highlighting the texture of the tiles and the natural grain of the wood.


AKDO®

MASON

*Urban. Modern. Durable.
Industrial inspired style.*

Far Beyond the Surface





Mason Ivory 2x2 Soft
PO2465-M002ST



Mason Ivory 12x24 Soft
PO2465-1224ST



Mason Ivory 24x48 Soft
PO2465-2448ST





Mason Plomb 2x2 Soft
PO2467-M002ST




Mason Plomb 12x24 Soft
PO2467-1224ST



Mason Plomb 24x48 Soft
PO2467-2448ST






Mason Steel 2x2 Soft
PO2466-M002ST



Mason Steel 12x24 Soft
PO2466-1224ST



Mason Steel 24x48 Soft
PO2466-2448ST

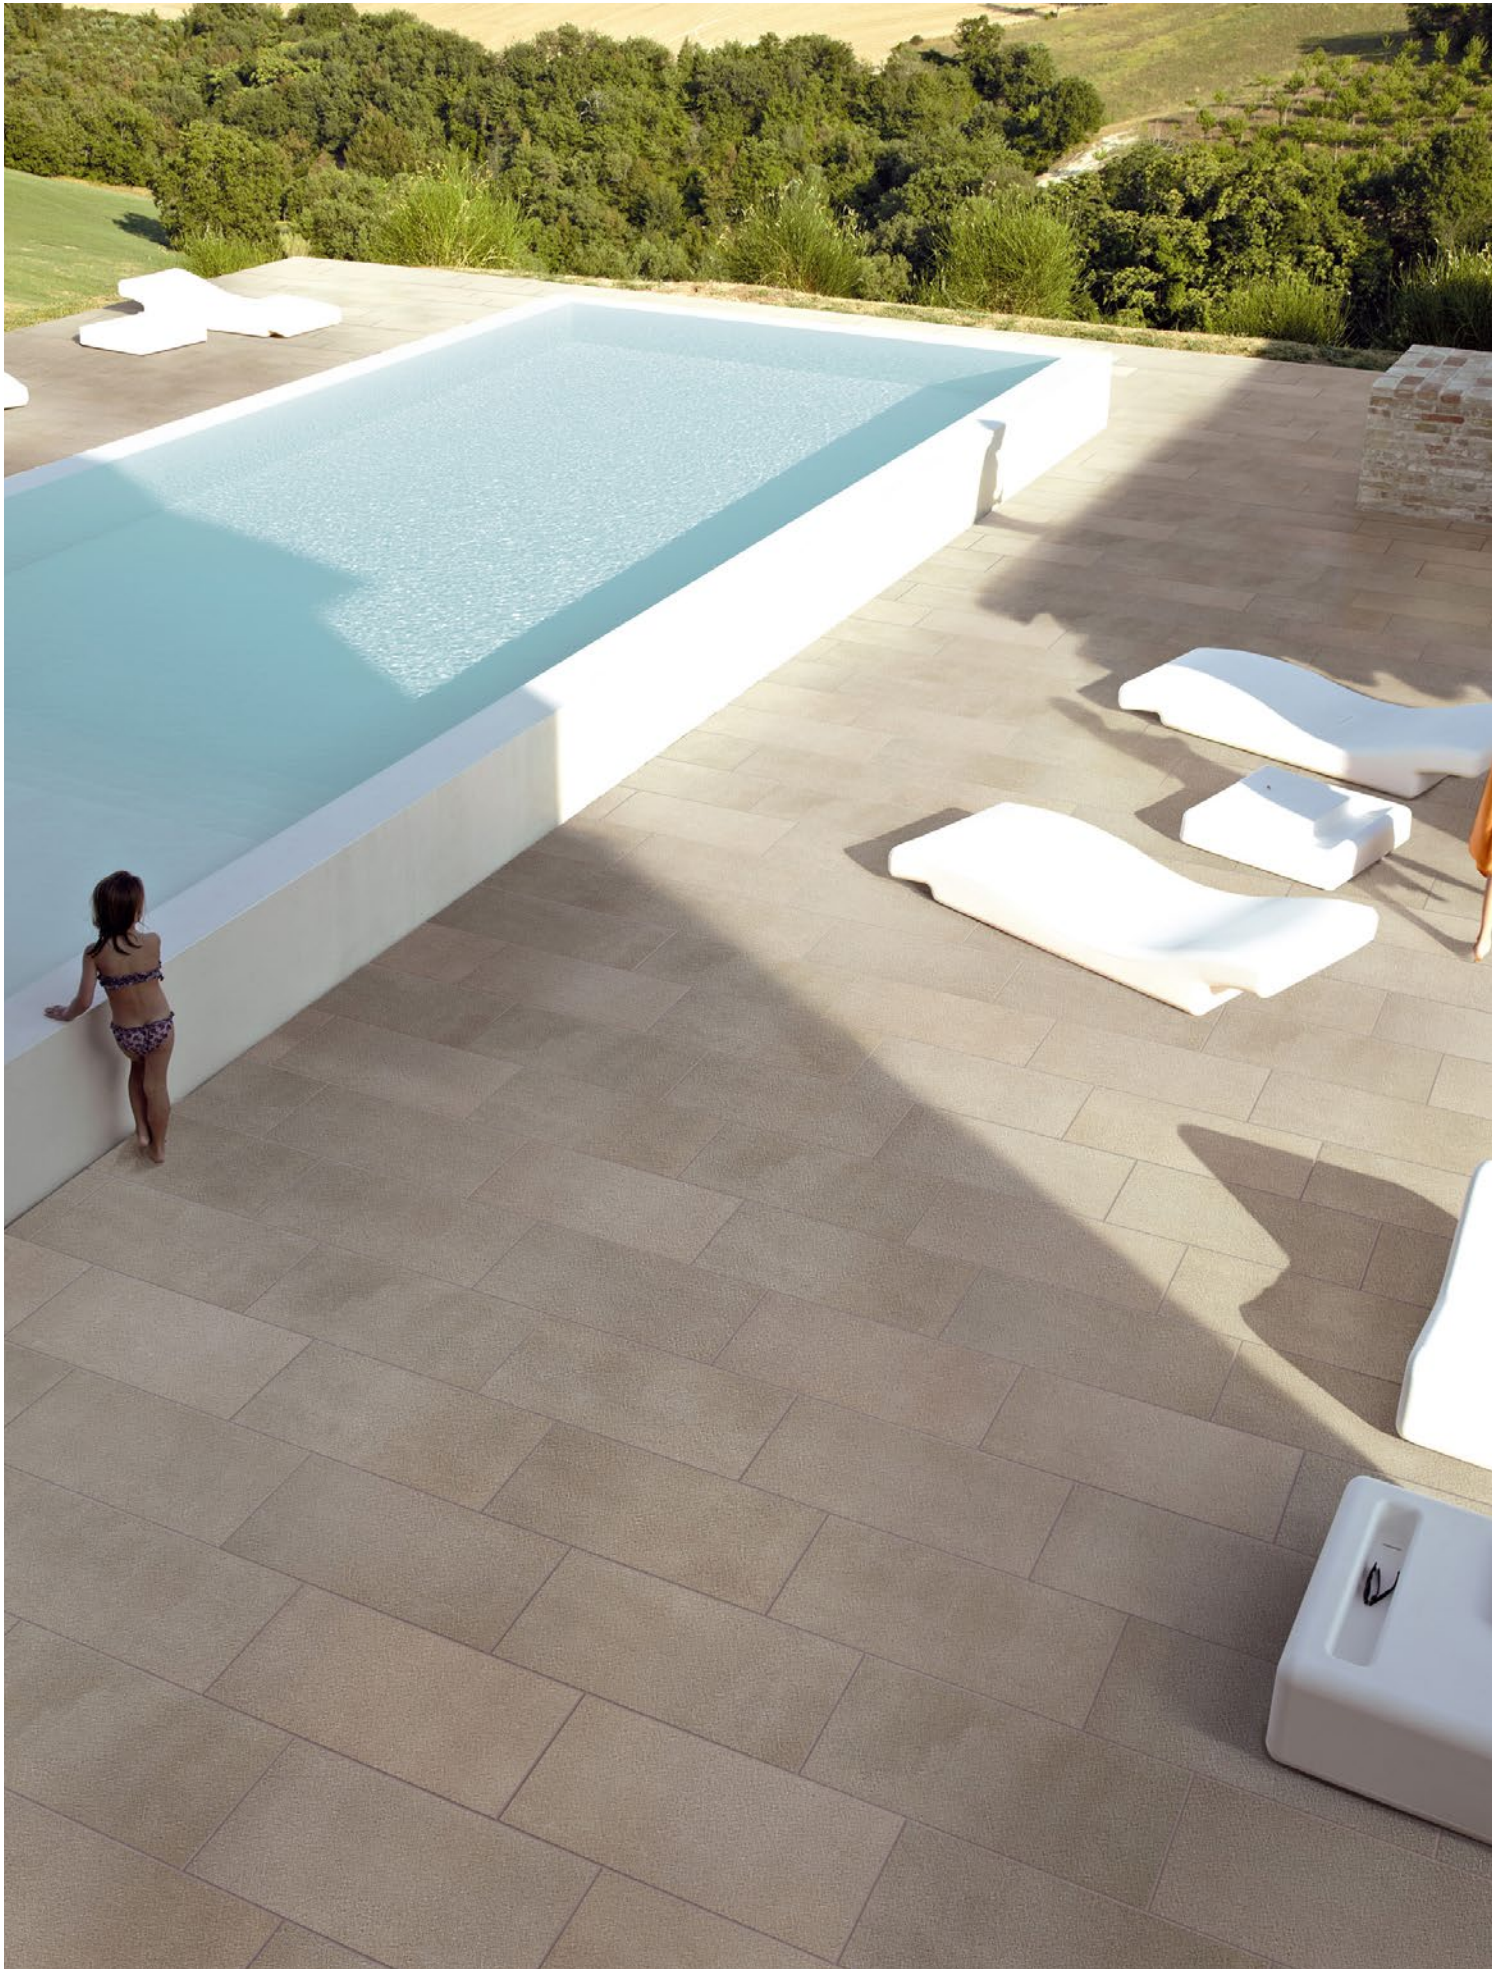



Mason Taupe 2x2 Soft
PO2468-M002ST



Mason Taupe 12x24 Soft
PO2468-1224ST



Mason Taupe 24x48 Soft
PO2468-2448ST



DIMENSIONS

PROFILE	SIZE
2" x 2" Mosaic	11.81" x 11.81" = .970 sqft
12" x 24" Tile	11.81" x 23.62" = 1.937 sqft
24" x 48" Tile	23.62" x 47.24" = 7.748 sqft

APPLICATIONS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL
Yes	Yes	Yes	Yes	Yes	Yes	Yes

TECHNICAL DATA

FEATURES	STANDARD TEST	RESULT
Length and width	ISO-10545-2	± 0.15%
Average thickness	ISO-10545-2	± 5%
Maximum straightness deviation	ISO-10545-2	± 0.1%
Maximum right-angle deviation	ISO-10545-2	± 0.2%
Flatness	ISO-10545-2	± 0.35%
Surface quality	ISO-10545-2	Compliant
Amount of water absorbed	ISO-10545-3	0.08%
Bending strength	ISO-10545-4	50 N/mm ²
Breaking strength	ISO-10545-4	3200 N
Resistance to deep abrasion	ISO-10545-6	140
Thermal shock resistance	ISO-10545-9	Resistant
Frost resistance	ISO-10545-12	Resistant
Resistance to high concentrations of acids and alkali	ISO-10545-13	UHA
Resistance to low concentrations of acids and alkali	ISO-10545-13	ULA
Resistance to domestic chemicals and additives for swimming pools	ISO-10545-13	UA
Resistance to high concentrations of acids and alkali	ISO-10545-13	UHA-UHB (Soft Finish)
Resistance to low concentrations of acids and alkali	ISO-10545-13	ULA-ULB (Soft Finish)
Resistance to staining	ISO-10545-14	Cl. 3-4
Slip resistance with shoes	DIN-51130:2010	R9 (Soft Finish)
Slip resistance with shoes	DIN-51130:2010	R10 (Matte Finish)
Slip resistance with shoes	DIN-51130:2010	R11 (Bush-Hammered Finish)
Barefoot slip resistance	DIN-51097	Cl. A+B (Matte Finish)
Barefoot slip resistance	DIN-51097	Cl. A+B+C (Bush-Hammered Finish)
Barefoot slip resistance	DIN-51097	Cl. A (Soft Finish)
Dynamic coefficient of friction	ANSI A 137.1 2012	>0.42 wet

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.
For detailed installation guidelines, visit akdo.com

AKDO

1435 State Street
Bridgeport, CT 06605
1.800.811.2536
203.336.5199 (o)
203.336.0603 (f)

AKDO NYC

22 West 21st Street
New York, NY 10010
1.800.811.2536
212.485.0448 (o)
212.485.0449 (f)

AKDO Pacific

3445 Arden Road
Hayward, CA 94545
1.888.909.2536
510.785.2536 (o)
510.785.0895 (f)

akdo.com