


HERITAGE HEXAGON BIRCH WHITE (M) *Porcelain*

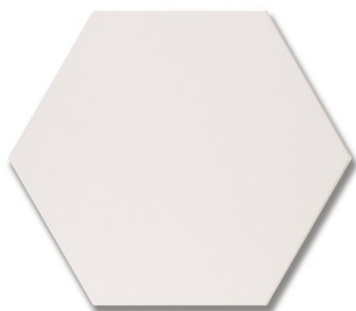

PART NUMBER
PO1901-HEXA00

PROFILE
TILE

AVAILABILITY
IN STOCK

GROUT JOINT
1/8"

DIMENSIONS
10.60" x 9.00" = .494 sqft

THICKNESS
3/8"

ORIGIN
Italy

NOTES

Available nationwide.

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

APPLICATION AREA

| WALL | FLOOR | TRAFFIC | EXTERIOR | STEAM SHOWER | WET AREA | POOL | BACKSPLASH | FIREPLACE SURROUND |
|------|-------|------------------|----------|--------------|----------|------|------------|--------------------|
| Yes | Yes | Light Commercial | Yes | Yes | Yes | Yes | Yes | Yes |

INTERIOR

Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to

TECHNICAL DATA

| FEATURES & STANDARD | SPECIFICATION | FEATURES & STANDARD | SPECIFICATION |
|--|--|---|--|
| Abrasion Resistance - ISO 10545-7 | Class 4 | Slip Resistance - UNI ENV 12633 | Class 1 |
| Barefoot Ramp Test - DIN 51097 | Class A | Breaking Strength - ISO 10545-4 | > 1300 N (P 7.5mm) > 700 N (c 7.5mm) Compliant |
| Chemical Resistance - ISO 10545-13 | Guaranteed (GA GLA GHA) | Coefficient of Thermal Linear Expansion - ISO 10545-8 | Test Method Available |
| Crazing Resistance - ISO 10545-11 | Resistant | Frost Resistance - ISO 10545-12 | Resistant |
| Bending Resistance - ISO 10545-4 | > 35 N/mm ² (P 7.5mm) Compliant | Scratch Resistance (MOHS) - EN 101 | 35 |
| Reaction to Fire - EN 13501-1 | A1 FL-A1 | Regularity of Length & Width - ISO 10545-2 | ± 0.6% Compliant |
| Regularity of Rectangularity - ISO 10545-2 | ± 0.5% Compliant | Regularity of Straightness of Sides - ISO 10545-2 | ± 0.5% Compliant |
| Surface Flatness - ISO 10545-2 | ± 0.5% | Water Absorption - ISO 10545-3 | ² 0.5% Compliant |
| Colour Resistance to Light - DIN 510914 | Resistant | Lead and Cadmium Given Off - UNI-EN ISO 10545-15 | Test Method Available |

FEATURES & STANDARD

DCOF - ANSI A.137.1

SPECIFICATION

> 0.42 (actual score .68)