


PENNY ROUNDS MERINGUE (G) *Porcelain*

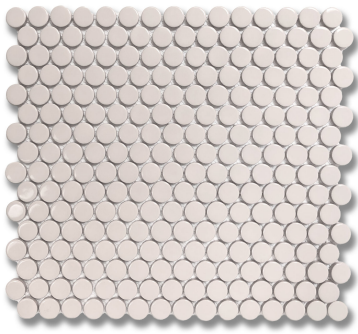

PART NUMBER
PO2509-PENYG0

PROFILE
MOSAIC

AVAILABILITY
IN STOCK

DIMENSIONS
11.57" x 12.40" = .996 sqft

APPLICATION AREA

| WALL | FLOOR | TRAFFIC | EXTERIOR | STEAM SHOWER | WET AREA | POOL | BACKSPLASH | FIREPLACE SURROUND |
|------|-------|---------------------|----------|-----------------|-------------|------|------------|-----------------------|
| Yes | Yes | Heavy Commercial | Yes | Yes | Yes | Yes | Yes | Yes |

INTERIOR

Yes

The performance of surface covering products often depends on installation, environmental, and usage factors unique to each project. AKDO is not responsible for any effects that may be caused to products due to installation, wear from use, or exposure to environmental factors including but not limited to: hard water, chemicals, heat, flame, smoke, dirt or other substances. It is your responsibility to assess the project to determine if the product you are selecting is appropriate considering the unique characteristics of your installation, and to apply appropriate, high quality sealers when necessary. Please consult your installer for more information.

TECHNICAL DATA

| FEATURES & STANDARD | SPECIFICATION | FEATURES & STANDARD | SPECIFICATION |
|--|---------------|---|---------------|
| Breaking Strength - ISO 10545-4 | 812 | Crazing Resistance - ISO 10545-11 | Pass |
| Regularity of Rectangularity - ISO 10545-2 | -0.12~+0.11 | Regularity of Straightness of Sides - ISO 10545-2 | -0.12~+0.11 |
| Surface Quality - ISO 10545-2 | Conformed | Resistance to Household Chemicals - ISO 10545-13 | Class GA |
| Resistance to Swimming Pool Salts - ISO 10545-13 | Class GA | Modulus of Rupture - ISO 10545-4 | 53 / 50~56 |