




AKDO®


MANTRA

*Bold. Direct. Definitive.
Unquestionably chic.*

Far Beyond the Surface

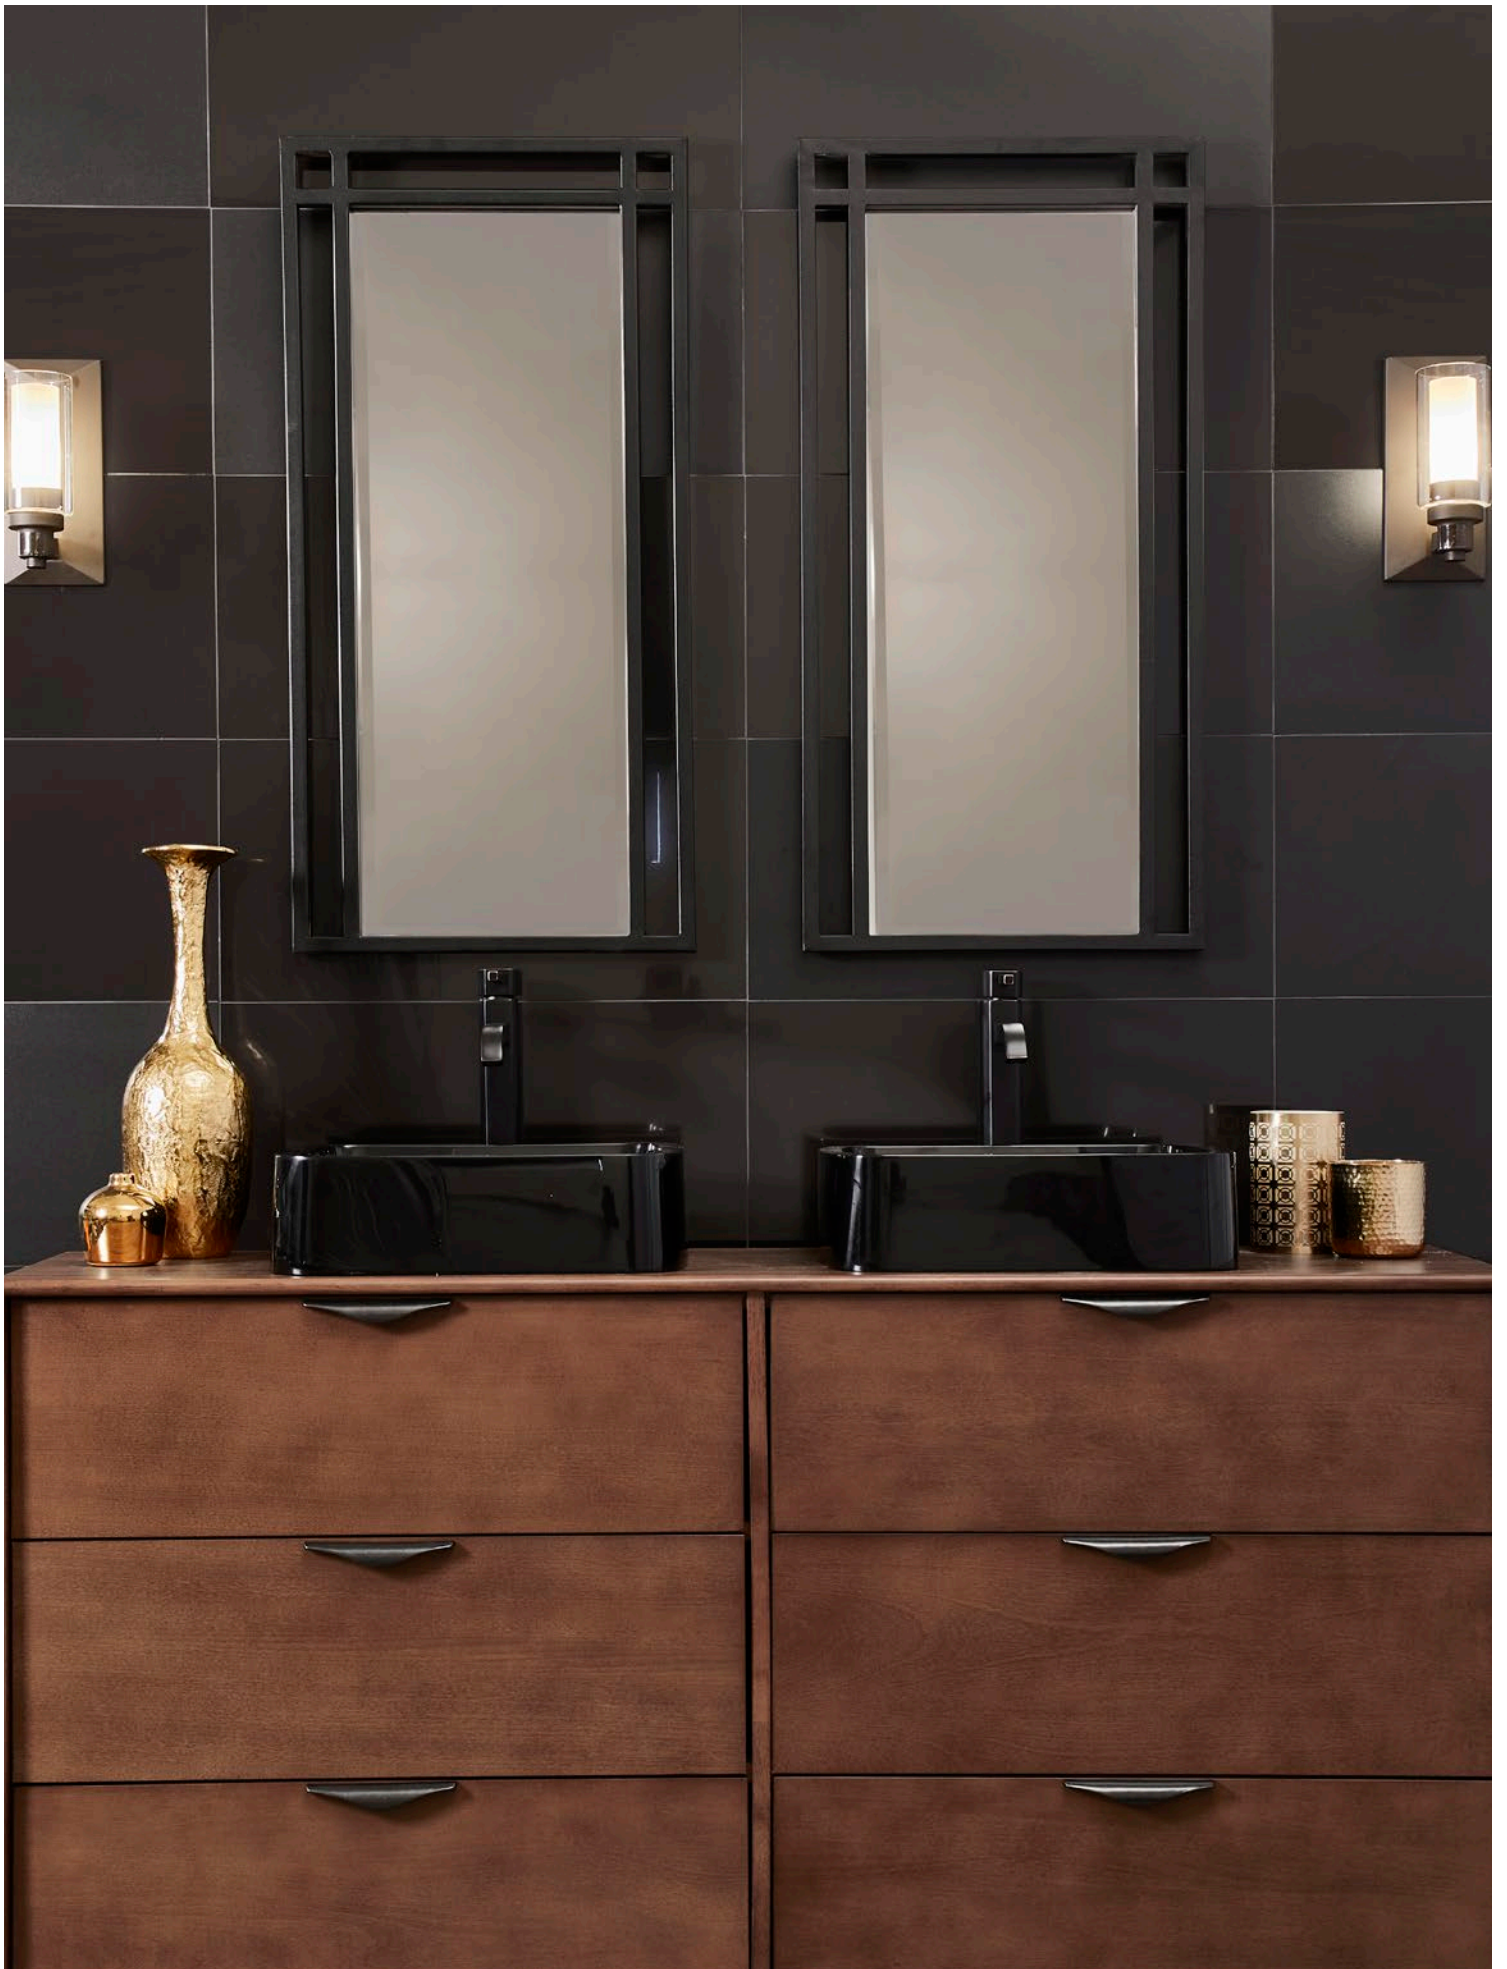


Black

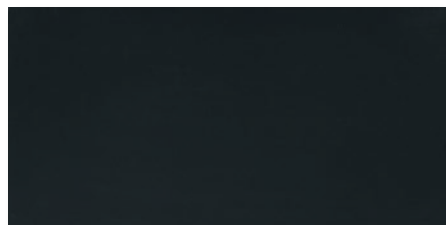

12" x 24" Mantra Black

(M) PO1959-1224M0

(P) PO1959-1224P0

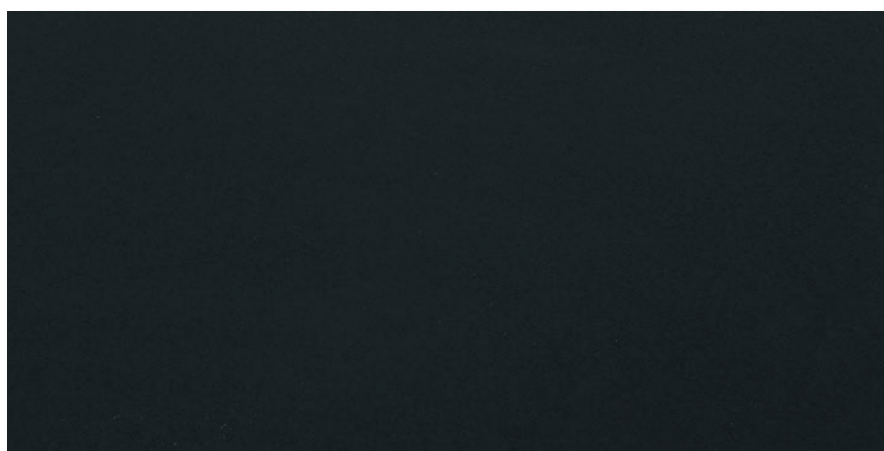


24" x 48" Mantra Black

(M) PO1959-2448M0

(P) PO1959-2448P0




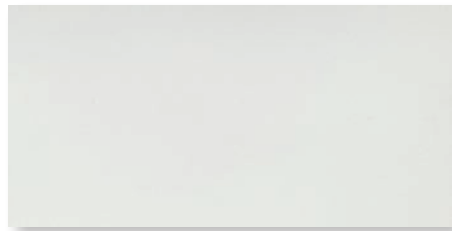

12" x 24" Mantra White

(M) PO1958-1224M0

(P) PO1958-1224P0

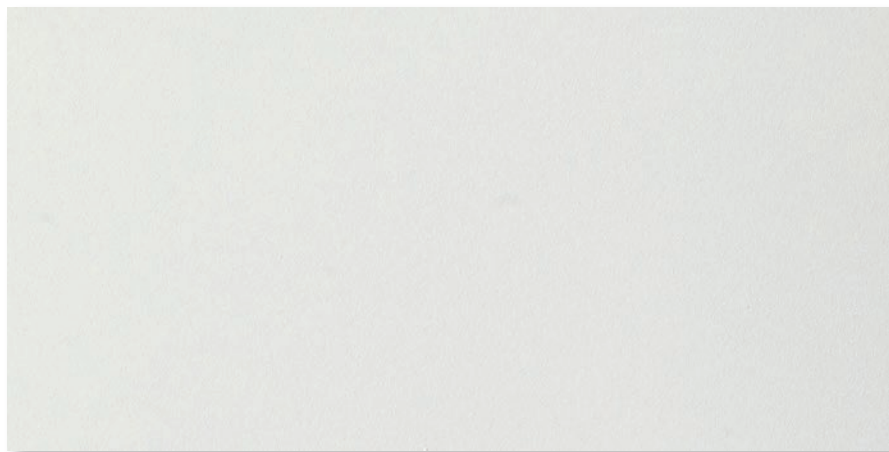

24" x 48" Mantra White (M)

(M) PO1958-2448M0

(P) PO1958-2448P0



DIMENSIONS

PROFILE	SIZE
12" x 24" Tile	11.81" x 23.62" = 1.937 sqft
24" x 48" Tile	23.62" x 47.24" = 7.748 sqft

APPLICATIONS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL
Yes	Yes	Yes	Yes	Yes	Yes	Yes

TECHNICAL DATA

FEATURES	STANDARD TEST	RESULT
Length and width	ISO-10545-2	± 0.15%
Average thickness	ISO-10545-2	± 5%
Maximum straightness deviation	ISO-10545-2	± 0.1%
Maximum right-angle deviation	ISO-10545-2	± 0.2%
Flatness	ISO-10545-2	± 0.35%
Surface quality	ISO-10545-2	Compliant
Amount of water absorbed	ISO-10545-3	0.08%
Breaking strength	ISO-10545-4	3200 N
Bending strength	ISO-10545-4	50 N/mm ²
Resistance to deep abrasion	ISO-10545-6	140 mm ³
Thermal shock resistance	ISO-10545-9	Resistant
Frost resistance	ISO-10545-12	Resistant
Resistance to staining	ISO-10545-14	Cl. 4 High-Glossy Cl. 5 Matte
Resistance to low concentrations of acids and alkali	ISO-10545-13	ULA-ULB Matte ULB High-Glossy
Resistance to domestic chemicals and additives for swimming pools	ISO-10545-13	UA
Slip resistance with shoes	DIN-51130:2010	R9 Matte
Dynamic coefficient of friction	ANSI A 137.1 2012	>0.42 wet Matte

Due to the inherent characteristics of porcelain, there may be variations in color, movement and texture from lot to lot.

For detailed installation guidelines, visit akdo.com

AKDO

1435 State Street
Bridgeport, CT 06605
1.800.811.2536
203.336.5199 (o)
203.336.0603 (f)

AKDO NYC

22 West 21st Street
New York, NY 10010
1.800.811.2536
212.485.0448 (o)
212.485.0449 (f)

AKDO Pacific

3445 Arden Road
Hayward, CA 94545
1.888.909.2536
510.785.2536 (o)
510.785.0895 (f)

akdo.com